




Steel Ball Butt Weld Machine Pneumatic Air Pressure With Sufficient Power

Our Product Introduction

for more products please visit us on wire-bendingmachine.com

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: Jin Hongxiang
- Certification: CE
- Model Number: JT-35
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Export wooden case packaging
- Supply Ability: 100 Set/Sets per Month

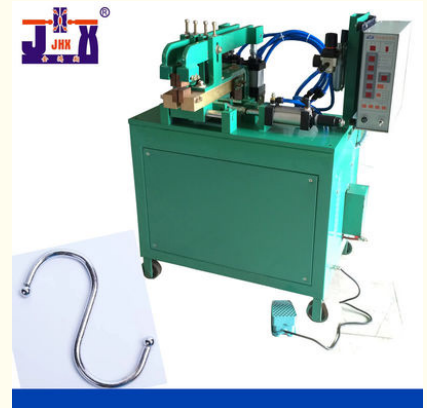

Product Specification

- Product Name: Air Pressure T-welder
- Applicable Industries: Kitchen And Bathroom Hardware Products, Lighting Processing
- Weight (KG): 180KG
- Voltage: 380V
- Feature: Slide Rail Push, Push More Flexible. Adjustable Cylinder Control Stroke, More Convenient Welding
- Advantage: With Sufficient Power, The Welding Is More Firm And Beautiful.
- After Warranty Service: Video Technical Support, Online Support
- Port: Shenzhen
- Highlight: **Ball Butt Weld Machine, Pneumatic Butt Weld Machine**





Product Description

Pneumatic butt welder is used for steel ball butt welding

Nickname

JE-35 air compression butt welding machine,
Circle butt welder,
Square butt welding machine,
Butt welding machine,
Ball butt welder,
Taiwan butt welding machine,
Precision butt welding machine,
Fast butt welding machine,
JE-50 butt welding machine,
Docking machine,
Touch welder,
Pneumatic butt welding machine.

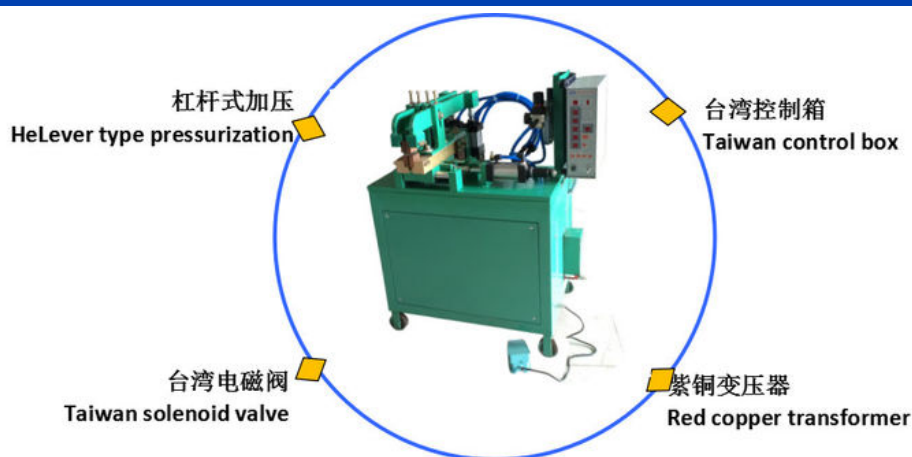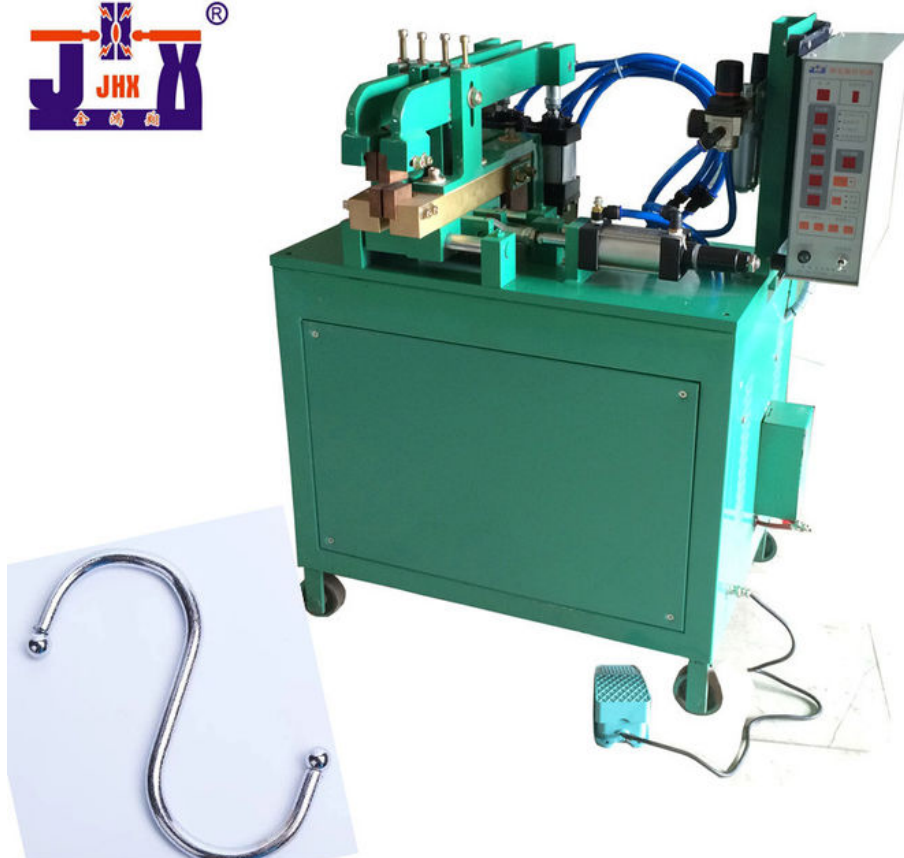


Capability feature

1. It can realize clamping, flattening and butt joint in the welding process, and can also discharge twice and three times to meet your different needs.
2. The equipment has ingenious design, simple operation and easy to master.


3. Pneumatic lever type pressurization is adopted, which has greater clamping force Ensure that there is no slip during working welding and the welding performance is more stable.
4. The movable sliding seat is guided by double guide rails and pushed by adjustable cylinders, High precision, good damage resistance, smooth and stable movement; Ensure the consistency of butt welding interface of workpiece.
5. Good molding The butt welding process is simple, with less shortening and burr of weldments, which is conducive to simplifying the subsequent process.

Basic structure


1. Increase and thicken conductive brass, wear-resistant alloy electrode and red copper strip, which are the key to ensure the export of current. If these same accessories meet the standard, they can have strong welding ability, good welding effect, longer machine durability and faster welding speed.

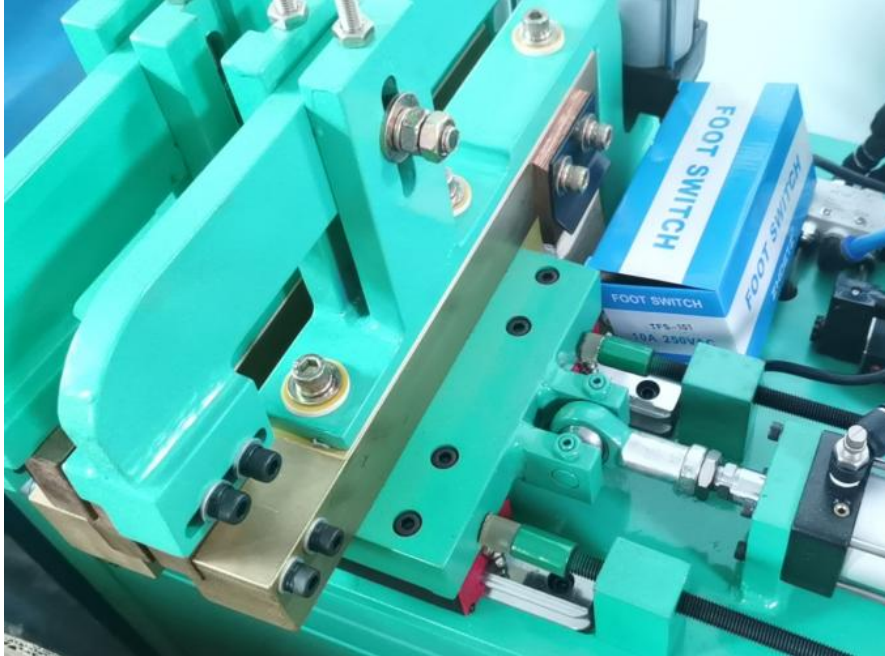

2. The integral pushing part shares 2 sets of double slider guide rails, which makes the movement easy and simple.

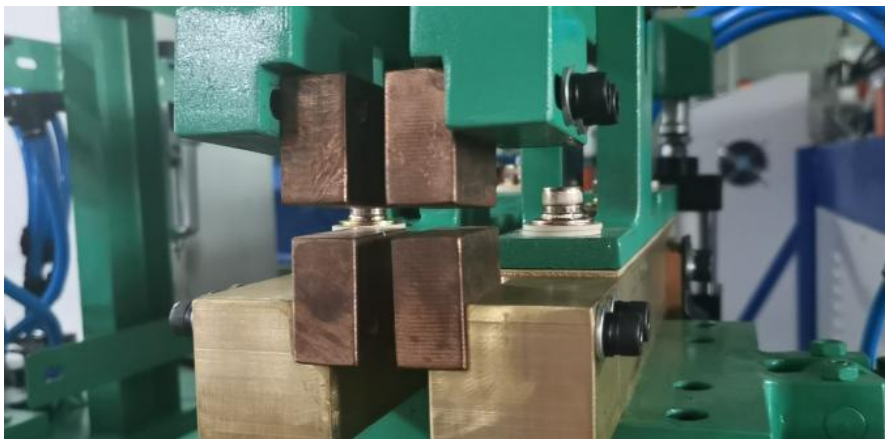

3. Push the cylinder to the left to make the welding position more accurate and the welding melting point more ideal.

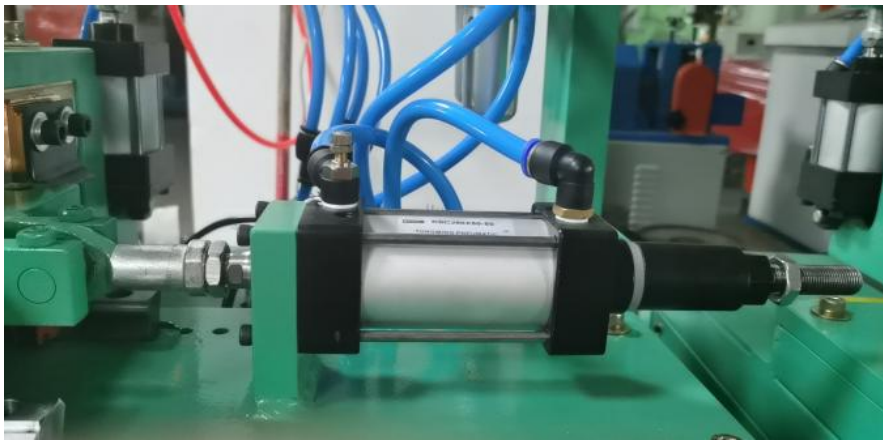

4. Lever pressure bar, with the help of lever principle, makes the pressure of welding point better.



5. Taiwan AirTAC Solenoid valve ,The solenoid valve with the same effect is more durable and faster.



6. Taiwan Yade politely moves the original, air pipe and connector. Independent two-piece, pressure reducing valve, convenient adjustment, oil injection, water filtration, adjustment, more independent.




7. Red copper coil, Baosteel silicon steel, transformer with sufficient capacity, large current and good welding effect. Not afraid of oxidation, the welding effect remains unchanged for a long time. Taiwan technology CNC control box (installed and fixed with shockproof nuts to cushion external vibration) has convenient adjustment, small spark, soft and stable current.



Technical parameters:					
Model	Rated power	Input voltage	weight	Welding ability	Packing size
JE-35	35KVA	380V/50HZ	180kg	φ8+φ8MM	110*80*115CM
JE-50	50KVA	380V/50HZ	250kg	φ10+φ10MM	110*80*115CM

Steel ball butt welding display: hook

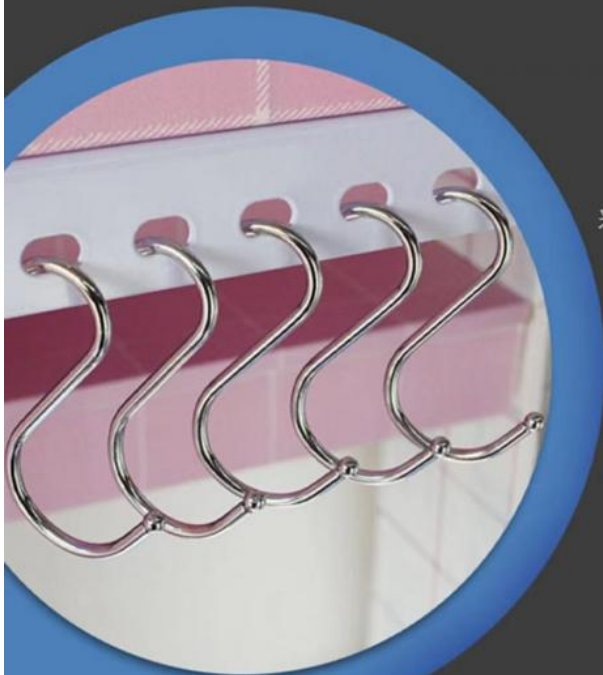



Dongguan Jinghongxiang Automation Equipment Co., Ltd.



13925780098



jhx16888@gmail.com



wire-bendingmachine.com

No. 78, Shangzhong Road, Shangdi Industrial Zone, Liaobu Town, Dongguan, Guangdong, China